# 36W 18-Bulb Pre-embedded Grid Light

Datasheet



HD-YM6018

Please scan the QR code above to check the latest version of datasheet!

Before using this product, please read this datasheet carefully and keep it properly!

Document Version：C

## ◇◆ Overview

**36W 18-Bulb Pre-embedded Grid Light** is a flicker-free LED light with constant current. The housing material is aluminum alloy and has a novel structure.

Mainly suitable for indoor places such as hotels, luxury homes, clubs, model rooms, sales offices, museums, restaurants, shopping malls, shops, etc. that require special lighting.

**Main functions:**

- 18-Bulb Mini Pre-embedded Grid Light with white/black painted finish (RAL 9016/RAL 9005) and black reflector;
- Work with DALI/0-10V/TRIAC dimming driver or built-in ON/OFF driver;
- LED 36W;
- Measurement 604mmx47mm; height of the profile inset 89mm;
- High color rendering at an index of CRI90;
- After a lifetime of 50000h min. 80% of the luminous flux;
- Precise beam characteristic with 15°/25°/30° beam angles;
- Lighting perfectly suitable for reading, writing as well as computer and control work according to DIN EN 12464-1(UGR<15);
- Degree of housing protection according to DIN EN 60529 (IP20).

Note: Please note that the pictures and illustrations provided in this instruction manual are for reference purposes only, and the actual product may differ.

## ◇◆ Appearance

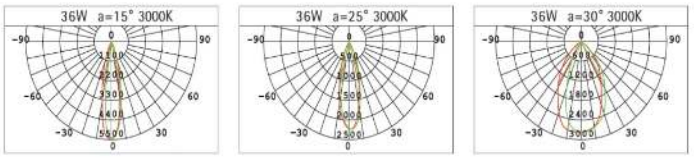


Figure 1

## ◇◆ Technical Data

| Item | Parameter |
|---|---|
| **LED** | |
| Adjustable color temperature | 2800K-6000K |
| Fixed color temperature | 2700K/3000K/3500K/4000K/5000K |
| CRI | >90 |

| | |
|---|---|
| L80B10 lifetime | 50,000h |
| SDCM | 3 |
| **Optics** | |
| CCT light beam angle | 15°/25°/30° |
| UGR | < 15 |
| System Output | 2160lm |
| **Power supply parameters** | |
| LED Driver | None/ON-OFF driver |
| LED Power | 36W |
| Rated voltage | 36V(Adjustable CCT Light)/54V(the other two) |
| Rated current | 600mA |




36W 15°

Lux

| h(m) | d(m) | Em | Emax |
|---|---|---|---|
| 1 | 0.23 | 3769 | 5491 |
| 2 | 0.46 | 942.3 | 1373 |
| 3 | 0.69 | 418.8 | 610.1 |

36W 25°

Lux


| h(m) | d(m) | Em | Emax |
|---|---|---|---|
| 1 | 0.51 | 1492 | 2236 |
| 2 | 1.02 | 372.9 | 559.1 |
| 3 | 1.53 | 165.8 | 248.5 |

36W 30°

Lux

| h(m) | d(m) | Em | Emax |
|---|---|---|---|
| 1 | 0.68 | 1954 | 2859 |
| 2 | 1.36 | 488.5 | 714.8 |
| 3 | 2.04 | 217.1 | 317.7 |

Figure 2- Adjustable CCT Light - Light Distribution

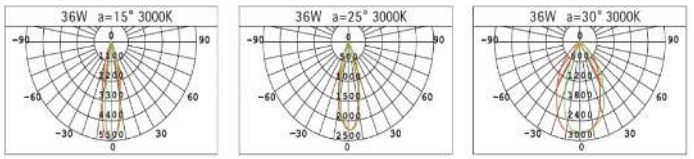


36W 15°

Lux

| h(m) | d(m) | Em | Emax |
|---|---|---|---|
| 1 | 0.23 | 3769 | 5491 |
| 2 | 0.46 | 942.3 | 1373 |
| 3 | 0.69 | 418.8 | 610.1 |

36W 25°

Lux

| h(m) | d(m) | Em | Emax |
|---|---|---|---|
| 1 | 0.51 | 1492 | 2236 |
| 2 | 1.02 | 372.9 | 559.1 |
| 3 | 1.53 | 165.8 | 248.5 |

36W 30°

Lux

| h(m) | d(m) | Em | Emax |
|---|---|---|---|
| 1 | 0.68 | 1954 | 2859 |
| 2 | 1.36 | 488.5 | 714.8 |
| 3 | 2.04 | 217.1 | 317.7 |

Figure 3- Fixed CCT Light - Light Distribution

Note: The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors.

## ◇◆ Specifications

| **Item** | **Parameter** |
|---|---|
| Dimensions | 604mm x47mm |
| Cutout | 606mm x 45mm |

| | |
|---|---|
| Height | 89mm |
| Installation site | Indoor |
| Light type | Grid Light |
| Installation | Pre-embedded |
| Version | Rectangle |
| Housing | White/black |
| Reflector | Black |
| IP degree (compliant with EN 60529) | IP20 |

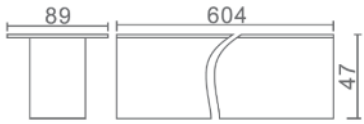



Figure 4

## ◇◆ Safety Precaution

**Danger:**

- Please do not privately disassemble or replace any parts of the product. Otherwise, it may cause mechanical fault, electric shock, fire or personal injuries.
- Under no circumstances should the product be covered by insulation pads or similar materials.

**Warning:**

- Installation and commissioning of this equipment must be carried out by us or by an organization appointed by us.
- The planning and construction of the electrical connection of this equipment must comply with the relevant local safety standards and regulations.
- Any consequences caused by failure to install and wire according to this instruction are not related to our company.
- Please refer all maintenance work to our after-sales department or designated organization, the warranty of this product does not apply to the failure caused by the user's disassembly of the product.

**Caution:**

- Before performing any installation or disassembly procedures, any maintenance or cleaning procedures on the device, it is crucial to disconnect the device from all voltage sources. This step is necessary to ensure the safety of the technician and prevent any potential damage to the device.
- Do not use corrosive liquid to wipe the device body, especially the interface, so to avoid damage to the device.
- Prior to performing maintenance or cleaning on the device, disconnect the device from all voltage sources, to avoid electric leakage and electric shock.
- After all of the cables are terminated, check for correct and good terminations.

- The matching between the driver and the light should be within the rated range and not beyond.

**Note:**

- The use of this product must not violate any safety regulations, and it must be 800mm away from the illuminated object.
- Ensure that this product is securely fastened to the surface of the installed object and not installed on ceilings that are easily damaged or deformed.
- In order to extend the service life and maintain the best lighting effect, it is recommended to regularly clean and maintain the product.

## ◇◆ Installation

**Warning**: Before performing any installation or disassembly procedures on the device, it is crucial to disconnect the device from all voltage sources. This step is necessary to ensure the safety of the technician and prevent any potential damage to the device.

**Standard**: GB/T 17743-2021;GB 7000.1-2015; GB 7000.202-2008

**The following is the installation method for pre-embedded grid light:**

**Step 1:** Turn off the power. Before painting the ceiling, create installation holes on the ceiling according to the cutting dimension of the light;

**Step 2:** Fix the outer ring (embedded part) on the ceiling with self tapping screws to prevent the ring from loosening, cracking, and falling ash after painting;

**Step 3:** After the installation of the outer ring (embedded parts) is completed, paint the ceiling to make the outer ring invisible;

**Step 4:** Before connecting the wires, make sure the power is turned off. Connect the mains power to the live wire and neutral wire input terminal. If there is intelligent control, connect the signal wire and place it on the ceiling. Remove the light cover and use screws to lock the lamp body with the embedded parts;

**Step 5:** Place the removed cover into the lamp;

**Step 6:** Before powering on, please ensure that the wiring is correct and that the product will not loosen.

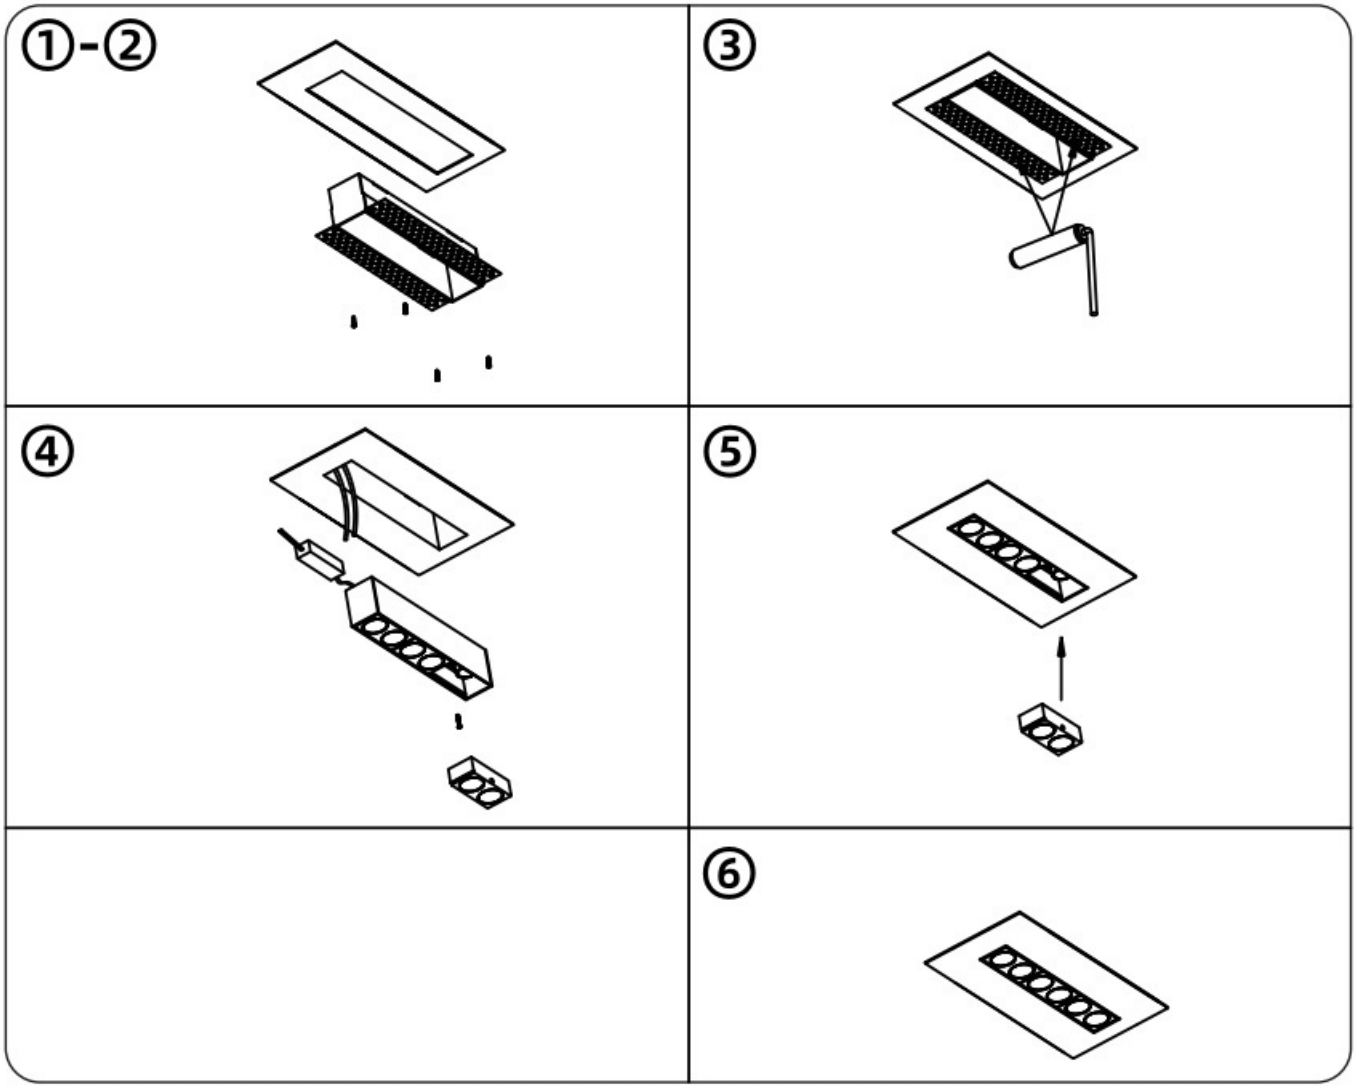



Figure 5

## ◇◆ Disassembly

**Warning**: Before performing any disassembly procedures on the device, it is crucial to disconnect the device from all voltage sources. This step is necessary to ensure the safety of the technician and prevent any potential damage to the device.

## ◇◆ Packing List

- Spotlight*1
- Driver*1(according to the order situation)

Note: After unpacking, please check if the product and the parts are complete.

## ◇◆ Copyright Statement

HDL has all the intellectual property rights to this document and contents thereof. Reproduction or distribution for third parties are prohibited without written authorization from HDL. Any infringement of HDL's intellectual property rights will be investigated the legal liability.

The contents of this document will be updated as the updates of product versions or other reasons. Unless otherwise agreed upon, this document is to be used as a guidance only. All the statements, information and recommendations in this document makes no warranty expressed or implied.

© 2025 HDL Automation Co., Ltd. All rights reserved.

**Update History:**

The form below contains the information of every update. The latest version contains all the updates of all former versions.

| Version | Update Information | Date |
| --- | --- | --- |
| V1.0 | Initial release | September 5, 2025 |

## ◇◆ Technical Support

E-mail: hdltickets@hdlautomation.com

Website: https://www.hdlautomation.com